

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 017 257 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
07.11.2001 Bulletin 2001/45

(51) Int Cl.7: **H05B 41/392**

(21) Application number: **99125890.6**

(22) Date of filing: **24.12.1999**

(54) **Backlight brightness controller**

Beleuchtungssteuerung einer Hinterbeleuchtung

Régulation de l'intensité lumineuse d'un éclairage par l'arrière

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: **31.12.1998 US 224593**

(43) Date of publication of application:
05.07.2000 Bulletin 2000/27

(73) Proprietor: **HONEYWELL INC.**
Minneapolis Minnesota 55408 (US)

(72) Inventors:
• **Meldrum, Richard M.**
Glendale, AZ 85310 (US)
• **Pitman, Bruce A.**
Phoenix, AZ 85027 (US)

(74) Representative: **Sturm, Christoph, Dipl.-Ing. et al**
Honeywell Holding AG,
IP Europe Law Dept.,
Kaiserleistrasse 39
63067 Offenbach am Main (DE)

(56) References cited:
EP-A- 0 572 207 **US-A- 3 919 592**
US-A- 4 463 284

• **PATENT ABSTRACTS OF JAPAN vol. 1998, no.**
11, 30 September 1998 (1998-09-30) & JP 10
148808 A (SEIKO EPSON CORP), 2 June 1998
(1998-06-02)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 017 257 B1

Description

[0001] The present invention relates, generally, to a control system for maintaining optimum efficiency of a backlight and, more particularly in a preferred embodiment, to a closed loop temperature controller for adjusting the temperature within a fluorescent lamp to thereby optimize lamp arc drive for a given predetermined brightness set point.

[0002] Screen displays which employ fluorescent lamp backlights are used extensively in commercial, military, and consumer electronic applications. For example, such backlights are commonly used in desktop computers, laptop computers, screen displays for industrial equipment, and in connection with "heads up" or other screen displays in the cockpits in both commercial and military aircraft.

[0003] Conventional fluorescent lamps are commonly employed in backlit Liquid Crystal Display (LCD) applications. In a typical LCD, alphanumeric characters and other graphical images are produced on the viewing screen by selectively energizing or de-energizing preselected pixels in a two dimensional matrix to display the information. In a normally black screen display, predetermined pixels are illuminated to display the data or information as illuminated characters on a black (or other dark shade) background. In a normally white display, on the other hand, the desired data and/or information corresponds to the non-illuminated pixels, such that the information appears as black (or other dark color) images on a white (or other light color) background. In either case, a bright, consistent "background" light is necessary to achieve desirable contrast on the flat screen display. Indeed, in certain applications (e.g., military avionics), the high contrast provided by a bright backlight is essential to proper operation of the display.

[0004] It is also desirable to obtain desired brightness while minimizing power consumption. This is particularly important in portable electronics, for example laptop computers and the like, where battery life is an important product feature.

[0005] Presently known systems, e.g. EP-A-0 572 207, for controlling the brightness of a fluorescent backlight lamp typically involve a control system for supplying lamp arc drive to the backlight, to thereby excite the gas atoms within the sealed lamp enclosure to create visible light. The amount of visible light emitted by the lamp is sensed, for example by a photodiode, and a feedback signal indicative of the brightness output of the lamp is fed back to a control circuit. This feedback signal (indicative of actual brightness) is compared to an input signal representative of a desired brightness level, and presently known control systems drive the difference between this actual signal and the desired signal to a minimum. Under this control regime, if the actual brightness is less than the desired brightness, the controller increases the lamp arc drive applied to the lamp until the actual brightness equals the desired brightness. If, on

the other hand, the actual brightness is greater than the desired brightness, the controller circuit reduces the magnitude of the lamp arc drive applied to the lamp until the actual brightness emitted from the lamp again equals the desired brightness level for the lamp. Presently known prior art brightness control systems typically employ a "cold spot" at a predetermined point on the lamp which functions to keep a certain amount of the gas (typically mercury) within the lamp in a condensed state. Such "cold spot" systems employ the well known principle that maintaining the temperature of the cold spot in a specified range allows for very efficient operation of the lamp. Presently known systems, however, often require expensive components to maintain the cold spot, and do not adequately compensate for drifting or degradation over time of some of the parameters which influence the efficiency of the lamp.

[0006] A fluorescent lamp control system is thus needed which overcomes the shortcomings of the prior art.

[0007] The present invention provides improved methods and apparatus for optimizing the operating efficiency of a fluorescent lamp. In accordance with a preferred embodiment of the present invention, a primary control system controls the lamp arc drive to the lamp. The primary control system includes a desired brightness set-point as a first input, and a feedback signal corresponding to actual brightness detected at the lamp as a second input. The primary controller is configured to drive the difference between the aforementioned first and second inputs to a minimum: that is, to the extent the actual (detected) brightness of the lamp is greater than the desired "set-point" brightness, the primary controller reduces the lamp arc drive applied to the lamp until the actual brightness exhibited by the lamp is equal to the desired set-point brightness. Conversely, to the extent the actual brightness of the lamp is less than the desired set-point brightness, the primary controller increases the lamp arc drive signal until the actual brightness exhibited by the lamp equals the desired set-point level. In accordance with one aspect of the present invention, the primary controller operates in real time, essentially adjusting the lamp arc drive instantaneously as a function of the detected brightness feedback signal.

[0008] In accordance with a further aspect of the present invention, a secondary controller is employed to fine tune the control of the lamp by determining whether the desired brightness level may be achieved more efficiently. In accordance with a preferred embodiment, the secondary controller has a slower response time than the primary controller, and is configured to vary one or more parameters associated with the lamp to maintain the desired output level in an optimally efficient manner by adjusting one or more of the following: lamp arc drive, lamp temperature, lamp pressure, lamp volume, the quantity of gas within the lamp, or any other parameter which may effect the relative proportion of gas within the lamp in the vapor phase compared to the

condensed phase or the efficiency with which the lamp produces a desired brightness output level.

[0009] In accordance with a preferred embodiment of the present invention, when the primary controller achieves an output brightness which is equal to the desired set-point brightness level, the primary controller outputs a constant lamp arc drive signal to the lamp. During this period in which a constant arc drive is applied to the lamp, the secondary controller varies a control parameter (e.g., temperature) associated with the gas within the lamp to determine whether a change in the control parameter (either upwardly or downwardly) causes a corresponding increase (or decrease) in lamp brightness. If lamp brightness decreases in response to varying the control parameter, the secondary controller may be configured to either reverse the change in the control parameter which caused the decrease in lamp brightness, or alternatively, the secondary controller may be configured to simply stop varying the control parameter in the direction which caused the decrease in lamp brightness.

[0010] If, on the other hand, the lamp brightness increases as a result of the secondary controller varying the control parameter, the secondary controller may be configured to continue to adjust the control parameter in the direction which caused an increase in the lamp output brightness until the lamp output brightness is maximized. Preferably, the parameter monitored and controlled by the secondary controller is the lamp temperature. This is achieved, for example, by monitoring and controllably varying the voltage and/or current through a resistive wire coupled to the lamp surface.

[0011] In accordance with the further aspect of the present invention, a desired lamp brightness output level may be achieved while driving the lamp arc drive required to obtain the desired lamp brightness to a minimum. Thus, the desired lamp brightness may be achieved while reducing the power required to achieve the desired brightness level. Such a reduction in total power required to operate the lamp at a desired brightness level may result in extended battery life for portable screen displays or other displays in which it is desired to conserve power; for example, in military and commercial avionics applications.

[0012] In accordance with yet a further aspect of the present invention, the use of a secondary controller permits more efficient operation of the lamp, resulting in reduced degradation of the lamp, and in particular the thin phosphorous layer on the surface of the lamp, thereby extending lamp life.

[0013] The subject invention will hereinafter be described in conjunction with the appended drawing figures, wherein like numerals denote like elements, and:

Figure 1 is a schematic diagram of a prior art screen display including a fluorescent lamp having a thermo-electric cooler attached thereto for maintaining a cold spot in the lamp;

Figure 2 is a schematic diagram of a prior art screen display including a fluorescent lamp which employs a lamp extension as a mechanism for maintaining a cold spot;

Figure 3 illustrates schematically in block diagram form a functional circuit illustrating primary and secondary controllers in accordance with one embodiment of the present invention;

Figure 4 is an exemplary flowchart diagram setting forth the operation of the primary and secondary controllers in accordance with a preferred embodiment of the present invention;

Figure 5 is an exemplary flowchart diagram of various steps associated with increasing a control parameter under the control of the secondary controller;

Figure 6 is an exemplary flowchart diagram of various steps involved in decreasing a control parameter under the control of a secondary controller; and Figure 7 is a schematic diagram illustrating an alternate embodiment of the invention, including the primary and secondary controllers of the present invention in conjunction with a cold spot or cold spot controller.

[0014] Referring now to Figure 1, an exemplary flat screen display system 102 suitably includes a flat screen 108, for example an LCD (shown in side cross-sectional view), illuminated by a backlight 110. The screen display system 102 further includes an AC power supply 104, an AC power conduit 103, a DC power supply 116, and a DC conduit 117 connected to a resistive wire 114 wrapped around lamp 110, with the lamp shown disposed within a lamp housing 106. For a more thorough discussion of prior art backlight systems, see, for example, Pitman et al., U.S. Patent No. 5,808,418 issued September 15, 1998.

[0015] Those skilled in the art will appreciate that lamp 110 is suitably filled with a quantity of gas, for example mercury, which interacts with a thin film layer of phosphorous 112 suitably coated on the inside walls of lamp 110. During operation of the lamp, an AC voltage is applied to the lamp, for example by AC power conduit 103, which causes an AC current to be driven through the gas. In addition, a resistive wire 114 is suitably wrapped or otherwise disposed about the outer surface of lamp 110, to thereby control the temperature of the lamp. By controlling the temperature of the lamp, a desired proportion of the total gas within the lamp may be maintained in the vapor phase, with a corresponding quantity of the gas within the lamp being maintained in the condensed phase. Those skilled in the art will appreciate that prior art systems attempted to control the efficiency of the lamp by maintaining the lamp at a predetermined optimum temperature.

[0016] With continued reference to Figure 1, in order to maintain an optimum temperature within the lamp, a cold shoe, for example a copper cold shoe 118, was em-

ployed in conjunction with a thermal-electric cooler 120. The thermal-electric cooler controlled the temperature of cold shoe 118, to thereby maintain a desired cold spot temperature for the lamp. By maintaining the cold spot within a desired range, prior art systems thereby insured reasonably efficient operation of the lamp. However, the use of cold shoes and thermal-electric coolers, as well as the need to employ a thermal-electric cooler control mechanism resulted in bulky, expensive control mechanisms.

[0017] Referring now to Figure 2, in which a similar flat screen display system 202 is depicted, but for which the aforementioned '418 patent discloses replacing prior art cold shoe and thermal-electric coolers with a lamp extension 218 which includes a portion that extends beyond the back wall and outside of lamp housing 206. By maintaining a portion of the lamp outside of the lamp housing, a natural "cold spot" could be maintained without the need for a thermal-electric cooler. As described in the '418 patent, this allowed the temperature of the cold spot to be controlled with air flow and a simple heater wire 220.

[0018] Prior art attempts to control the location and temperature of a cold spot have proved unsatisfactory in several regards. For example, a continued cold spot may be unreliable and unpredictable; indeed, the present inventors have determined that additional cold spots may develop within the lamp during operation which impedes the ability to accurately control the temperature and pressure of the gas within the lamp. Moreover, cold spots can move from place to place within the lamp, and may also be distributed about a large area of the lamp. However, the present inventors have further determined that the existence of one or more cold spots within a lamp need not impede precise control of the relevant lamp gas parameters, as long as the desired brightness may be obtained with a relatively low amount of arc drive.

[0019] Referring now to Figure 3, in which an exemplary lamp control circuit 302 in accordance with a preferred embodiment of the invention is depicted. Lamp control circuit 302 suitably includes a lamp 330, a lamp heater 334 (e.g., a resistive wire), a sensor or transducer 336 (e.g., a photodiode), a gain stage 316, a first controller 304, and a second controller 314. In the context of this description, first controller 304 is variously referred to herein as controller C_p (or primary controller), whereas second controller 314 is variously referred to herein as controller C_T (or secondary controller).

[0020] In accordance with a preferred embodiment to the present invention, a brightness set-point signal V_{sp} is suitably applied to a first input 308 of primary controller 304, and a brightness feedback signal 338 (V_{fb}) is suitably applied to a second input 306 of primary controller 304. In a preferred embodiment, feedback signal 338 is suitably indicative of the actual brightness exhibited by the lamp, for example as detected by the sensor or transducer 336 (e.g., photodiode) near the surface of

the lamp. It will be appreciated that the desired brightness level, V_{sp} , may be varied by the operator of the screen display, for example by a pilot, computer terminal operator, or other user of equipment employing a flat screen display which utilizes lamp control system 302.

[0021] Primary controller 304 essentially functions in real-time to maintain an output brightness level from the lamp, as detected by sensor or transducer 336, which is equal to the desired set-point brightness level V_{sp} . In this regard, any suitable control scheme may be employed to maintain a desired brightness level, for example, by using a proportional controller, a proportional-integral controller, or a proportional-integral-derivative control scheme.

[0022] Primary controller 304 suitably outputs an output control signal 340 (also referred to herein as V_c) which is applied to a gain circuit 316, which in turn, produces a lamp arc drive signal 320 (also referred to herein as V_d) which is applied to the lamp to excite the gas within the lamp. It will be appreciated that the gain stage may be a part of or integrated into the primary controller 304 (i.e., such that the primary controller 304 supplies sufficient arc drive to drive the lamp).

[0023] Those skilled in the art will appreciate that the excitation of the gas within the lamp causes the gas atoms to be excited to a higher energy state, such that the gas atoms liberate a photon as the gas atoms return to a lower energy state. The photons emitted by these gas atoms collide with phosphorous atoms within the phosphorous layer inside the lamp, causing the phosphorous atoms to liberate photons in the visible spectrum. The phosphorous atoms release these photons in the visible light spectrum which illuminates the screen display. Those skilled in the art will also appreciate that the luminescence of the phosphorous layer degrades over time, causing unnecessary power consumption and shorter lamp life. By minimizing degradation of the phosphorous layer, power consumption may be reduced, whereas battery life and lamp life may be extended. In accordance with a preferred aspect of the present invention, optimally efficient use of the lamp promotes lower power consumption, decreased phosphorous degradation, and extended lamp life.

[0024] With continued reference to Figure 3, primary controller 304 suitably applies an appropriate lamp arc drive signal V_d to the lamp, causing lamp 330 to emit light. Sensor 336 detects the brightness of the emitted light and generates a brightness feedback signal 338 which is equal to the desired brightness level established by the set-point value V_{sp} . In accordance with a preferred embodiment of the invention, secondary controller 314 is superimposed on the primary control scheme in a manner which allows the lamp to produce the desired brightness level at a minimum arc drive level. In accordance with one preferred embodiment of the present invention, this may be achieved by operating the lamp at an optimum temperature for a given set-point V_{sp} value. The secondary control scheme described in

relation to this preferred embodiment uses temperature as the controller parameter. It will be appreciated, however, that the present invention may be employed using other convenient control parameters to fine tune lamp brightness control. Other control parameters may be employed in the context of the present invention including, for example: the pressure within the lamp, the volume within the lamp, the amount of gas within the lamp, or any one or more of the foregoing alone or in conjunction with control of the arc drive frequency, voltage, or current through the gas.

[0025] With continued reference to Figure 3, secondary controller 314 suitably applies a control signal 326 (also referred to herein as V_T) to heater wire 334. Changing the temperature in the lamp changes the amount of gas (e.g., mercury) that is in the vapor phase. In this way, secondary controller 314 suitably controls the temperature of the lamp, to thereby achieve the optimum operating temperature of the lamp to achieve a desired brightness level as determined by brightness set-point V_{sp} .

[0026] The operation of the secondary controller 314 in accordance with a preferred embodiment of the invention will now be described. A primary controller 304 adjusts V_c such that the detected brightness level (V_{fb}) is equal to the desired brightness level (V_{sp}). When an equilibrium is established, the output (V_c) of primary controller 304 is constant. This means that the desired brightness level is equal to the actual brightness level. However, it remains to be determined whether the desired output brightness level may be achieved at a lower arc drive. With the output of primary controller 304 constant, secondary controller 314 suitably "tweaks" the temperature of the gas within the lamp slightly upwardly or slightly downwardly to determine whether placing more or less gas in the vapor phase within the tube may result in more efficient operation of the lamp.

[0027] More particularly, for a constant output V_c of primary controller 304, secondary controller 314 suitably increases the temperature of the lamp by increasing output signal V_T . By increasing the lamp temperature, the brightness of the lamp will either increase or decrease. If the brightness level increases, sensor or transducer 336 will detect this increase in the actual brightness level and, in response, primary controller 304 will drive its output V_c lower until the detected brightness level (indicated by signal V_{fb}) equals the desired brightness level (V_{sp}). In this case, a slight increase in the temperature of the gas within the lamp results in achieving the desired brightness level at a lower arc drive, thereby conserving power and reducing degradation of the phosphorous layer within the lamp. Moreover, secondary controller 314 may suitably be configured to continue to increase the temperature as long as the increased temperature results in a higher output brightness level from the lamp. For example, when mercury is the gas within the lamp, it is usually preferred that the temperature of the lamp not increase beyond 75 degrees C. At

the point at which further increases in lamp temperature no longer produce a higher brightness level that is output from the lamp (or, alternatively, until the actual brightness level produced by the lamp decreases), the secondary controller 314 either stops increasing the lamp temperature or begins to reduce the lamp temperature.

[0028] Under certain operating conditions, it may be desirable to reduce the temperature of the lamp and still achieve a brighter output level from the lamp for a given lamp arc drive, for example, if external or environmental factors (e.g., sunlight or other heat radiating equipment proximate to the screen display) heat the lamp. Thus, it may be desirable to vary the output of secondary controller 314 to alternately cycle the lamp temperature upwardly and downwardly to achieve optimum lamp performance. In accordance with a particularly preferred embodiment of the present invention, a "dither" algorithm may be employed whereby lamp temperature is cycled upwardly until the brightness level produced by the lamp falls off, whereupon the temperature of the lamp is cycled downwardly until lamp output brightness level falls off, and so on. It will be appreciated that virtually any type of control scheme, including linear variations, non-linear variations, or variations which are a function of multiple parameters may be employed to control the temperature (or other control parameter) which is controlled by secondary controller 314.

[0029] More particularly, secondary controller 314 may suitably be configured to execute various modified control algorithms depending on such parameters as, for example, the brightness set-point value (shown as input 310 to secondary controller 314), the actual temperature of the lamp (for example as sensed by thermistor 328 and provided as an input 322 to secondary controller 314), and/or as a function of the voltage or frequency value of input signal 324 indicative of lamp temperature. Moreover, although secondary controller 314 has been described as functioning when signal V_c is constant, the secondary controller may suitably operate even as the output from the primary controller 304 (namely, output V_c), is varying.

[0030] In accordance with a further aspect of the present invention, secondary controller 314 may be disabled when the brightness set-point value V_{sp} is changing. Alternatively, inasmuch as secondary controller 314 is a relatively low authority or long-term controller, it may be desirable to simply allow secondary controller 314 to continue its fine tuning control function even as brightness set-point signal V_{sp} is varied.

[0031] Referring now to Figures 4-6, the logical operation of control system 302 will now be described. With particular reference to Figure 4 which depicts a flow chart 402, controller operation may suitably begin when the screen display is turned on, or when the lamp reaches a certain desired threshold temperature (step 404). With continued reference to Figure 4 and with momentary reference to Figure 3, the actual brightness level of

the lamp 330 is compared to the desired brightness level (step 406). If the actual brightness level from the lamp (V_{fb}) is not equal to the desired brightness level (V_{sp}) ("no" branch from step 406), primary controller 304 will adjust its output V_c until the actual brightness level equals the desired brightness level (step 408). When the actual brightness level from the lamp is equal to the desired brightness level ("yes" branch from step 406), the secondary controller C_T may be enabled (step 410). Or, as discussed above, the secondary controller C_T may be allowed to operate even as the primary controller C_p controls the arc drive. Secondary controller C_T then determines, in accordance with its own internal control algorithm, whether the lamp temperature should be increased or decreased (step 412). In accordance with the illustrated embodiment, if the output signal V_T was increased (i.e., the temperature was increased) during the last operational cycle of the secondary controller C_T ("yes" branch from step 412), then the "decreased temperature" algorithm set forth in Figure 6 may be performed. If, on the other hand, the output signal V_T was last decreased ("no" branch from step 412), then an "increase temperature" algorithm may suitably be employed (step 416).

[0032] More particularly in referring now to Figures 3 and 5, secondary controller C_T suitably determines whether V_c is constant, i.e., whether the actual brightness signal detected from the lamp is equal to the desired brightness level (step 504). If the actual brightness level of the lamp is not equal to the desired brightness level ("no" branch from step 504), then the primary controller C_p is employed to drive the actual brightness of the lamp equal to the desired brightness level (step 506).

[0033] If, on the other hand, the desired brightness level from the lamp equals the actual brightness level from the lamp ("yes" branch from step 504), secondary controller C_T will slightly increase the temperature within the lamp to determine if the desired brightness level may be achieved at a lower arc drive (step 508). Upon increasing the temperature of the lamp, the actual brightness level of the lamp will either increase or decrease. For a given set-point value, if the actual brightness level of the lamp increases as lamp temperature increases, the output signal V_c from primary controller 304 will be reduced ("yes" branch from step 510), resulting in more efficient operation of the lamp while maintaining the desired output brightness level. The system then continues to increase the temperature of the lamp in accordance with any suitable control algorithm (step 508) to determine if yet even more efficient lamp operation is achievable. It will be appreciated that although Figure 5 implies that the brightness feedback signal V_{fb} will be equal to the brightness set-point signal V_{sp} ("yes" branch from step 504), there may be small deviations or variations within this control scheme. Furthermore, when the output signal V_c goes down ("yes" branch from step 510) and the system continues to increase the out-

put signal V_T , it will be appreciated that again there may be small deviations or variations within this control scheme. If further increase in lamp temperature results in a lower detected lamp brightness level, primary controller 304 will increase the arc drive to maintain the desired brightness level (corresponding to the "no" branch from step 510). At this point, the secondary controller C_T will stop increasing temperature (step 512), inasmuch as the secondary controller C_T has determined that any further increase in temperature will not result in a further improvement in lamp operating efficiency. The system then goes to step 514 which directs the system to go to step 412 (Figure 4) to determine whether the lamp temperature should be increased or decreased, accordingly.

[0034] With momentary reference to Figure 4, when it is determined that the last operational cycle of events described immediately above of the secondary controller C_T involved an increase in lamp temperature which did not result in increased lamp operating efficiency ("yes" branch from step 412), it may be desirable to decrease lamp temperature in the next operational cycle of the secondary controller C_T to determine whether a slightly lower lamp operating temperature may result in increased lamp operating efficiency (step 414 of Figure 4). Otherwise, it may be desirable to increase lamp temperature in the next operational cycle of the secondary controller C_T to determine whether a slightly higher lamp operating temperature may result in increased lamp operating efficiency (step 416 of Figure 4).

[0035] Referring now to Figure 6, if the actual brightness level is not equal to the desired brightness level (the "no" branch from step 604), the primary controller C_p will change the arc drive to a point where the detected brightness level equals the desired brightness level of the lamp (step 606). In accordance with the illustrated embodiment, once the desired brightness level has been achieved ("yes" branch from step 604), the secondary controller C_T may attempt to decrease lamp temperature to determine whether further operating efficiency may be achieved (step 608). If a decrease in temperature results in an increased detected brightness from the lamp, the primary controller C_p will reduce the arc drive to maintain an actual brightness level produced by the lamp which is equal to the desired brightness level ("yes" branch from step 610). In the preferred exemplary embodiment, the secondary controller C_T will again increase the lamp temperature slightly for so long as further operational efficiencies are obtained. It will be appreciated that although Figure 6 implies that the brightness feedback signal V_{fb} will be equal to the brightness set-point signal V_{sp} ("yes" branch from step 604), there may be small deviations or variations within this control scheme. Furthermore, when the output signal V_c goes down ("yes" branch from step 610) and the system continues to decrease the output signal V_T , it will be appreciated that again there may be small deviations or variations within this control scheme. Once the system

reaches the point where further decreases in lamp temperature do not result in an increased brightness level from the lamp, the ("no" branch from step 610), the secondary controller C_T suitably stops decreasing lamp temperature (step 612). The system then goes to step 614 which directs the system to go to step 412 (Figure 4) to determine whether the lamp temperature should be increased or decreased, accordingly.

[0036] Referring now to Figure 7, in which an exemplary lamp control circuit 702 illustrates a further embodiment of the invention. An exemplary lamp control circuit 702 suitably includes a lamp 730, a lamp heater 734 (e.g., a resistive wire), a sensor or transducer 736 (e.g., a photodiode), a first controller 704, a second controller 714, a gain stage 716, and a cold spot or cold spot controller 750. In the context of this description, the elements in Figure 7 are analogous to the elements in Figure 3, with the exception of cold spot or cold spot controller 750.

[0037] With continued reference to Figure 7 and with momentary reference to Figures 3-6, this embodiment of the invention may be employed both without a fixed cold spot or in conjunction with a fixed cold spot. Cold spot or cold spot controller 750 (e.g., a copper cold shoe) may be employed with the present invention using virtually any known cold spot control techniques, including the invention disclosed herein. The cold spot controller 750 may be a thermo-electric cooler (TEC), a thermo-electric control mechanism (TCM), or any other known cold spot control mechanism.

Claims

1. An apparatus (302, 702) for controlling a first parameter of a lamp (330, 730), comprising:

a sensor (336, 736) configured to detect the first parameter of the lamp and to generate a feedback signal which is indicative of the first parameter;

a primary controller (304, 704) having a first input (306, 706) to receive said feedback signal, and an output (340, 740) to provide an output signal to control a drive signal (320, 720) applied to the lamp (330, 730); and **characterised by**

a secondary controller (314, 714) having a second input (312, 712) to receive said output signal, and a second output (326, 726) configured to apply a second output signal to control second parameter associated with the lamp, whereby said secondary controller (314, 714) employs a dithering algorithm to control said second parameter.

2. A method for controlling a first parameter of a lamp, comprising the steps of:

sensing the first parameter of the lamp and generating a feedback signal which is indicative of the first parameter;

applying said feedback signal to a primary controller;

outputting from said primary controller an output signal to control a drive signal applied to the lamp; **characterised by**

providing a secondary controller responsive to said output signal; and

controlling a second parameter associated with the lamp by applying a second output signal generated by said secondary controller to the lamp, whereby said secondary controller (314, 714) employs a dithering algorithm to control said second parameter.

3. The apparatus of claim 1 wherein the first parameter comprises the brightness level of the lamp.
4. The apparatus of claim 1 wherein said primary controller (304, 704) is configured to adjust said drive signal to control the first parameter in accordance with a set-point signal (308, 708).
5. The apparatus of claim 1 wherein said second parameter relates to the temperature associated with the lamp.
6. The apparatus of claim 1 wherein said second parameter relates to the pressure within the lamp.
7. The apparatus of claim 1 wherein said second parameter relates to the volume within the lamp.
8. The apparatus of claim 1 wherein said second parameter relates to the amount of gas within the lamp.
9. The apparatus of claim 1 wherein said sensor (336, 736) comprises a photodiode, said primary controller comprises an error control amplifier (304, 704) with a gain stage (316, 716), and said secondary controller (314, 714) employs said dithering algorithm to control at least one of the temperature, pressure, volume, and the amount of gas within the lamp.
10. The apparatus of claim 1 further comprising a cold spot (750) including a copper cold shoe associated with the lamp.
11. The apparatus of claim 1 further comprising a cold spot controller (750) associated with the lamp.
12. The apparatus of claim 11 wherein said cold spot controller (750) comprises a thermo-electric cooler (TEC).

13. The apparatus of claim 11 wherein said cold spot controller (750) comprises a thermo-electric control mechanism (TCM).
14. Use of an apparatus according to claim 1 in a liquid crystal display (LCD).

Patentansprüche

1. Vorrichtung (302, 702) zur Regelung eines ersten Parameters einer Lampe (330, 730), umfassend:

einen Sensor (336, 736), der so konfiguriert ist, daß er den ersten Parameter der Lampe erkennt und ein Rückkopplungssignal erzeugt, das den ersten Parameter anzeigt;
einen Primärregler (304, 704) mit einem ersten Eingang (306, 706) zum Empfangen des Rückkopplungssignals und einem Ausgang (340, 740) zum Bereitstellen eines Ausgangssignals zur Regelung eines Ansteuersignals (320, 720), das an die Lampe (330, 730) angelegt wird; und **gekennzeichnet durch**
einen Sekundärregler (314, 714) mit einem zweiten Eingang (312, 712) zum Empfangen des Ausgangssignals und einem zweiten Ausgang (326, 726), der so konfiguriert ist, daß er ein zweites Ausgangssignal anlegt, um einen der Lampe zugeordneten zweiten Parameter zu regeln, wobei; der Sekundärregler (314, 714) einen Dither-Algorithmus verwendet, um den zweiten Parameter zu regeln.

2. Verfahren zur Regelung eines ersten Parameters einer Lampe, mit den folgenden Schritten:

Messen des ersten Parameters der Lampe und Erzeugen eines Rückkopplungssignals, das den ersten Parameter anzeigt;
Anlegen des Rückkopplungssignals an einen Primärregler;
Ausgeben eines Ausgangssignals aus dem Primärregler, um ein Ansteuersignal zu regeln, das an die Lampe angelegt wird; **gekennzeichnet durch**
das Bereitstellen eines Sekundärreglers, der auf das Ausgangssignal reagiert; und
das Regeln eines zweiten der Lampe zugeordneten Parameters **durch** Anlegen eines von dem Sekundärregler erzeugten zweiten Ausgangssignals an die Lampe, wobei der Sekundärregler (314, 714) einen Dither-Algorithmus verwendet, um den zweiten Parameter zu regeln.

3. Vorrichtung nach Anspruch 1, wobei der erste Parameter die Helligkeit der Lampe umfaßt.

4. Vorrichtung nach Anspruch 1, wobei der Primärregler (304, 704) so konfiguriert ist, daß er das Ansteuersignal einstellt, um den ersten Parameter gemäß einem Sollwertsignal (308, 708) zu regeln.

5. Vorrichtung nach Anspruch 1, wobei der zweite Parameter mit der der Lampe zugeordneten Temperatur zusammenhängt.

6. Vorrichtung nach Anspruch 1, wobei der zweite Parameter mit dem Druck in der Lampe zusammenhängt.

7. Vorrichtung nach Anspruch 1, wobei der zweite Parameter mit dem Volumen in der Lampe zusammenhängt.

8. Vorrichtung nach Anspruch 1, wobei der zweite Parameter mit der Gasmenge in der Lampe zusammenhängt.

9. Vorrichtung nach Anspruch 1, wobei der Sensor (336, 736) eine Fotodiode umfaßt, der Primärregler einen Fehlerregelverstärker (304, 704) mit einer Verstärkungsstufe (316, 716) umfaßt und der Sekundärregler (314, 714) den Dither-Algorithmus verwendet, um mindestens einen der Werte Temperatur, Druck, Volumen und Gasmenge in der Lampe zu regeln.

10. Vorrichtung nach Anspruch 1, weiterhin mit einem Kaltpunkt (750), der einen der Lampe zugeordneten Kupfer-Kaltkörper enthält.

11. Vorrichtung nach Anspruch 1, weiterhin mit einem der Lampe zugeordneten Kaltpunktregler (750).

12. Vorrichtung nach Anspruch 11, wobei der Kaltpunktregler (750) ein thermoelektrisches Kühlelement (TEC) umfaßt.

13. Vorrichtung nach Anspruch 11, wobei der Kaltpunktregler (750) einen thermoelektrischen Regelmechanismus (TCM) umfaßt.

14. Verwendung einer Vorrichtung nach Anspruch 1 in einer Flüssigkristallanzeige (LCD).

Revendications

1. Appareil (302, 702) de régulation d'un premier paramètre d'une lampe (330, 730), comprenant :

un capteur (336, 736) configuré pour détecter le premier paramètre de la lampe et pour générer un signal de rétroaction reflétant le premier paramètre ;

- un régulateur primaire (304, 704) présentant une première entrée (306, 706) pour recevoir ledit signal de rétroaction, et une sortie (340, 740) pour fournir un signal de sortie pour réguler un signal d'excitation (320, 720) appliqué à la lampe (330, 730) ; et **caractérisé par** un régulateur secondaire (314, 714) présentant une deuxième entrée (312, 712) pour recevoir ledit signal de sortie, et une deuxième sortie (326, 726) configurée pour appliquer un deuxième signal de sortie pour réguler un deuxième paramètre associé à la lampe, ledit régulateur secondaire (314, 714) faisant appel à un algorithme de tremblement (« dither ») pour réguler ledit deuxième paramètre.
2. Procédé de régulation d'un premier paramètre d'une lampe, comprenant les étapes consistant à :
- détecter le premier paramètre de la lampe et générer un signal de rétroaction reflétant le premier paramètre ;
appliquer ledit signal de rétroaction à un régulateur primaire ;
fournir dudit régulateur primaire un signal de sortie pour réguler un signal d'excitation appliqué à la lampe ; **caractérisé par** les étapes consistant à
prévoir un régulateur secondaire sensible audit signal de sortie ; et
réguler un deuxième paramètre associé à la lampe en appliquant à la lampe un deuxième signal de sortie généré par ledit régulateur secondaire, ledit régulateur secondaire (314, 714) faisant appel à un algorithme de tremblement (« dither ») pour réguler ledit deuxième paramètre.
3. Appareil selon la revendication 1, dans lequel le premier paramètre comprend le niveau de luminosité de la lampe.
4. Appareil selon la revendication 1, dans lequel ledit régulateur primaire (304, 704) est configuré pour ajuster ledit signal d'excitation pour réguler le premier paramètre conformément à un signal de point de consigne (308, 708).
5. Appareil selon la revendication 1, dans lequel ledit deuxième paramètre concerne la température associée à la lampe.
6. Appareil selon la revendication 1, dans lequel ledit deuxième paramètre concerne la pression à l'intérieur de la lampe.
7. Appareil selon la revendication 1, dans lequel ledit deuxième paramètre concerne le volume à l'intérieur de la lampe.
8. Appareil selon la revendication 1, dans lequel ledit deuxième paramètre concerne la quantité de gaz à l'intérieur de la lampe.
9. Appareil selon la revendication 1, dans lequel ledit capteur (336, 736) comprend une photodiode, ledit régulateur primaire comprend un amplificateur de protection contre les erreurs (304, 704) avec un étage de gain (316, 716), et ledit régulateur secondaire (314, 714) fait appel audit algorithme de tremblement (« dither ») pour réguler au moins un paramètre parmi la température, la pression, le volume et la quantité de gaz à l'intérieur de la lampe.
10. Appareil selon la revendication 1, comprenant en outre un point froid (750) comportant un patin froid en cuivre associé à la lampe.
11. Appareil selon la revendication 1, comprenant en outre un régulateur de point froid (750) associé à la lampe.
12. Appareil selon la revendication 1, dans lequel ledit régulateur de point froid (750) comprend un refroidisseur thermoélectrique (TEC).
13. Appareil selon la revendication 1, dans lequel ledit régulateur de point froid (750) comprend un mécanisme de régulation thermoélectrique (TCM).
14. Utilisation d'un appareil selon la revendication 1 dans un affichage à cristaux liquides (LCD).

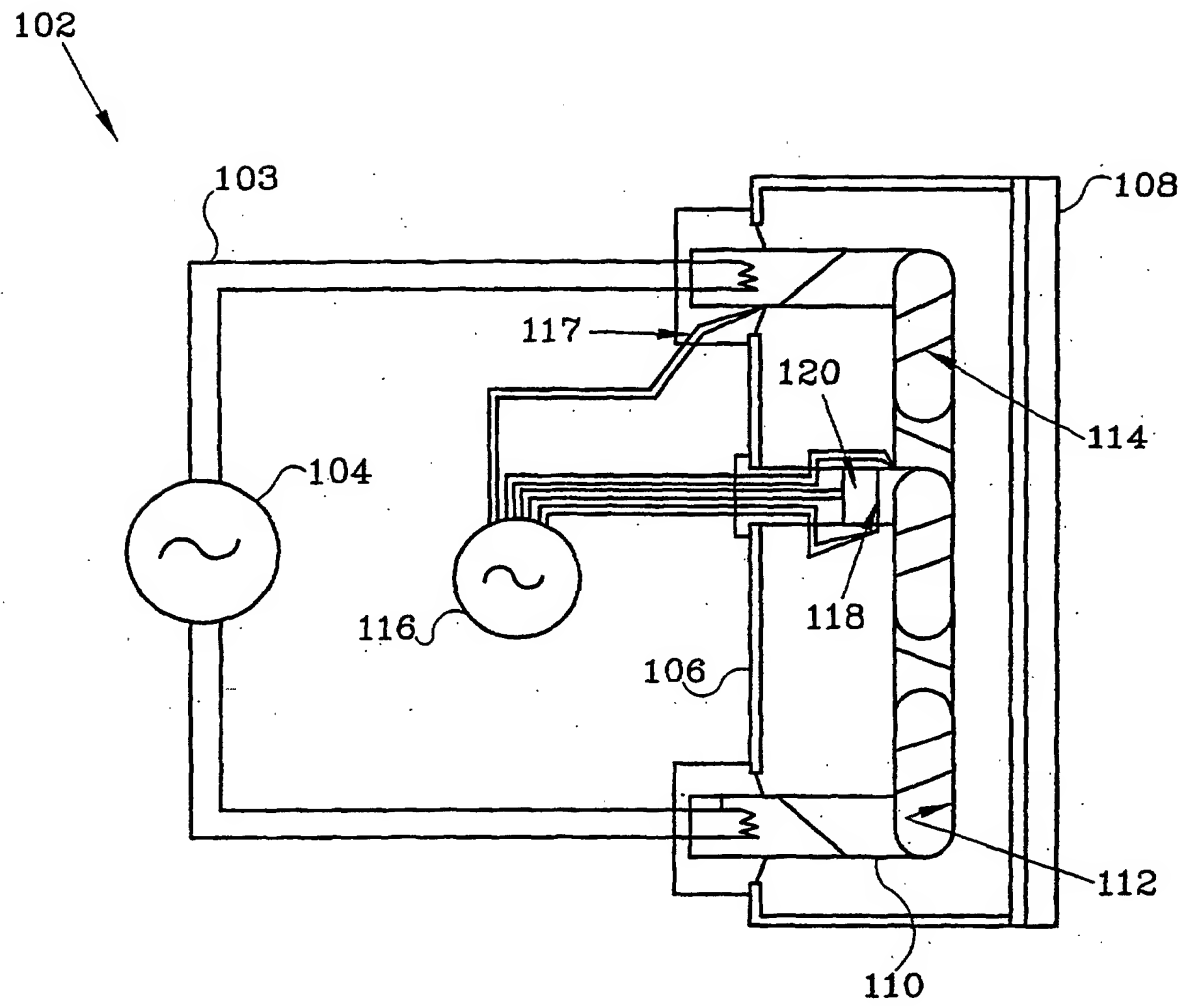


Fig.1

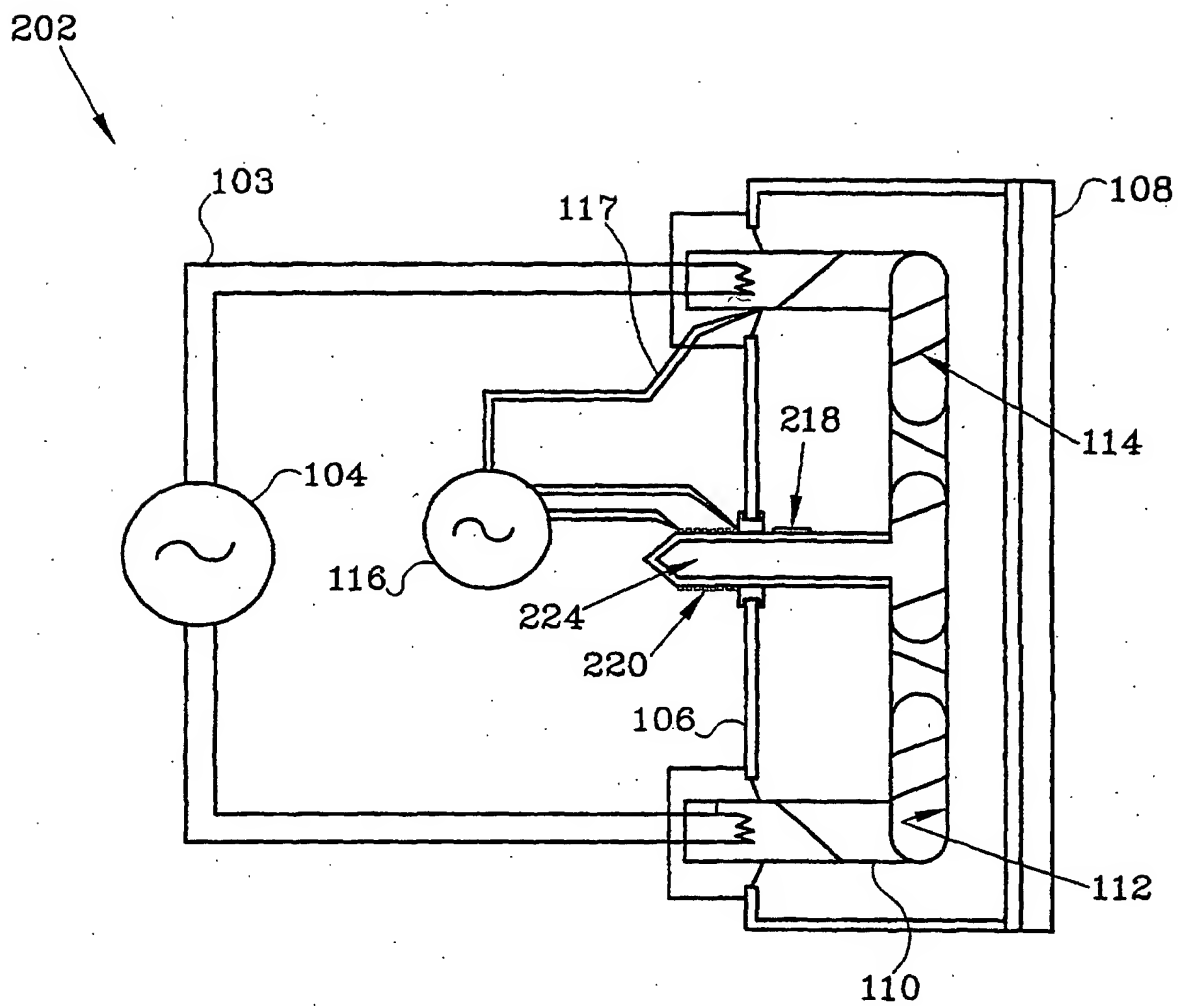


Fig. 2

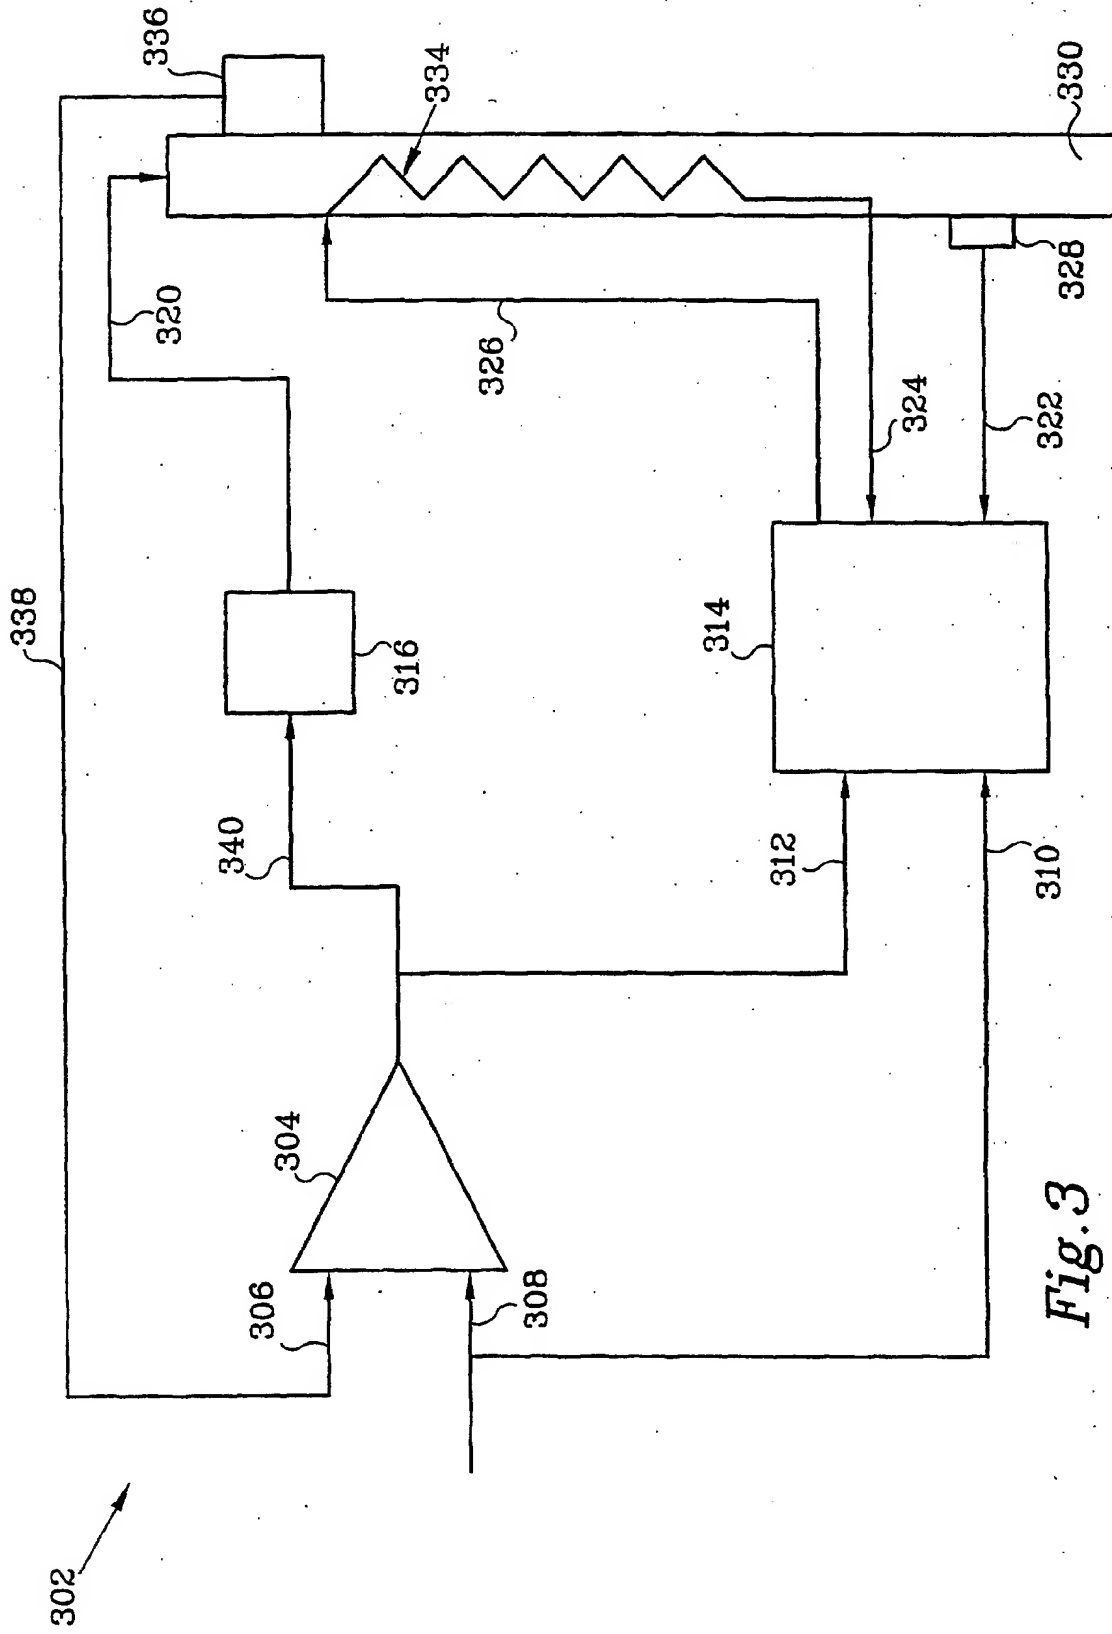
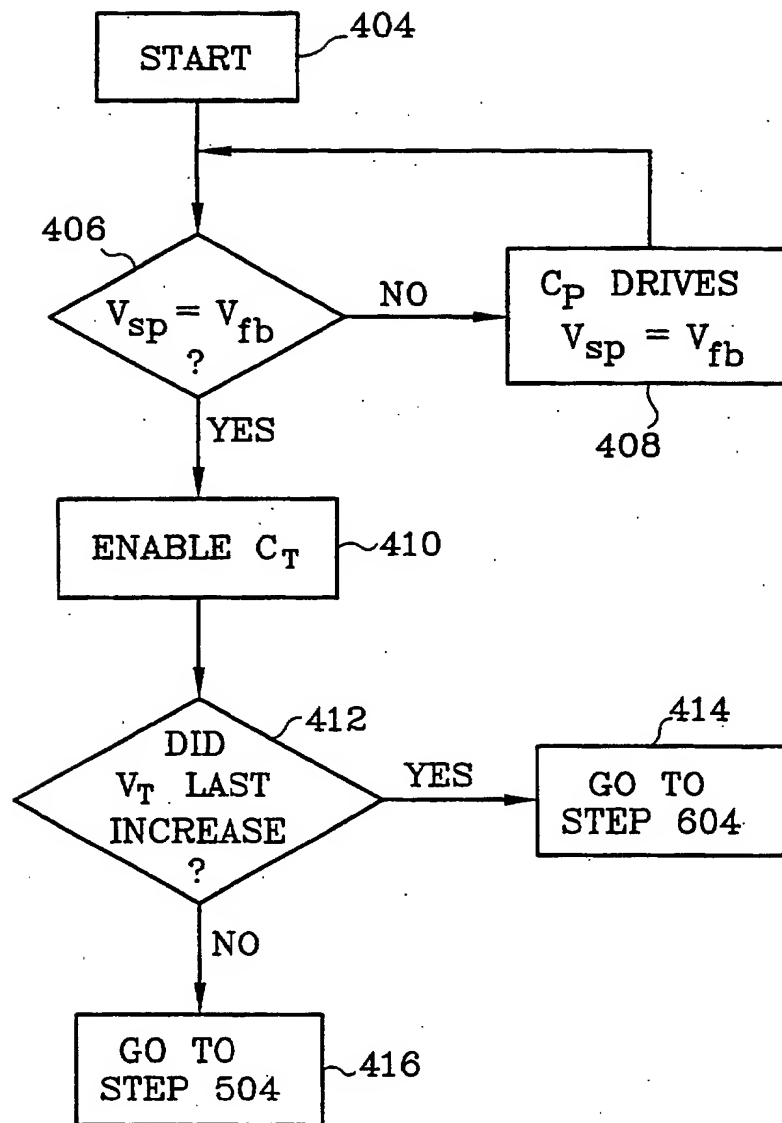
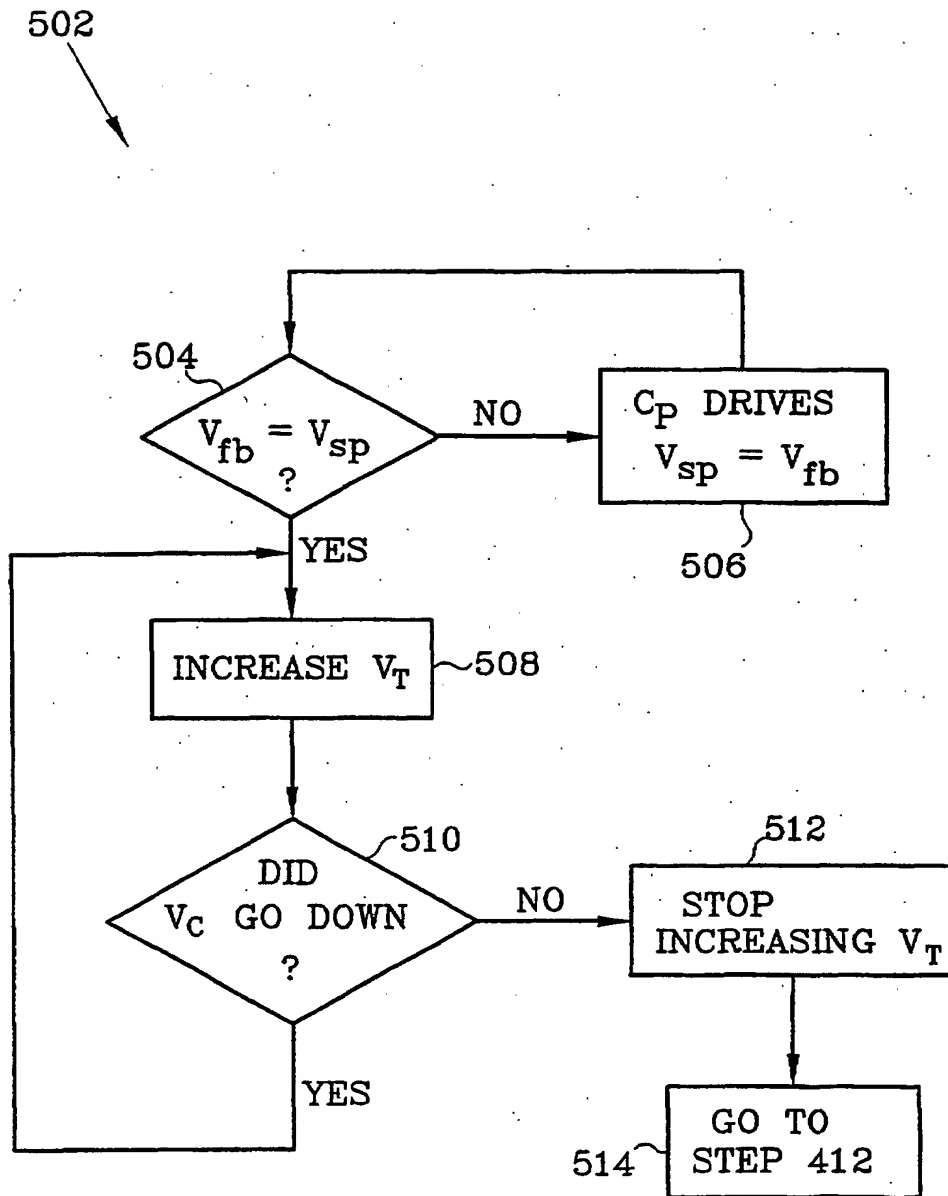
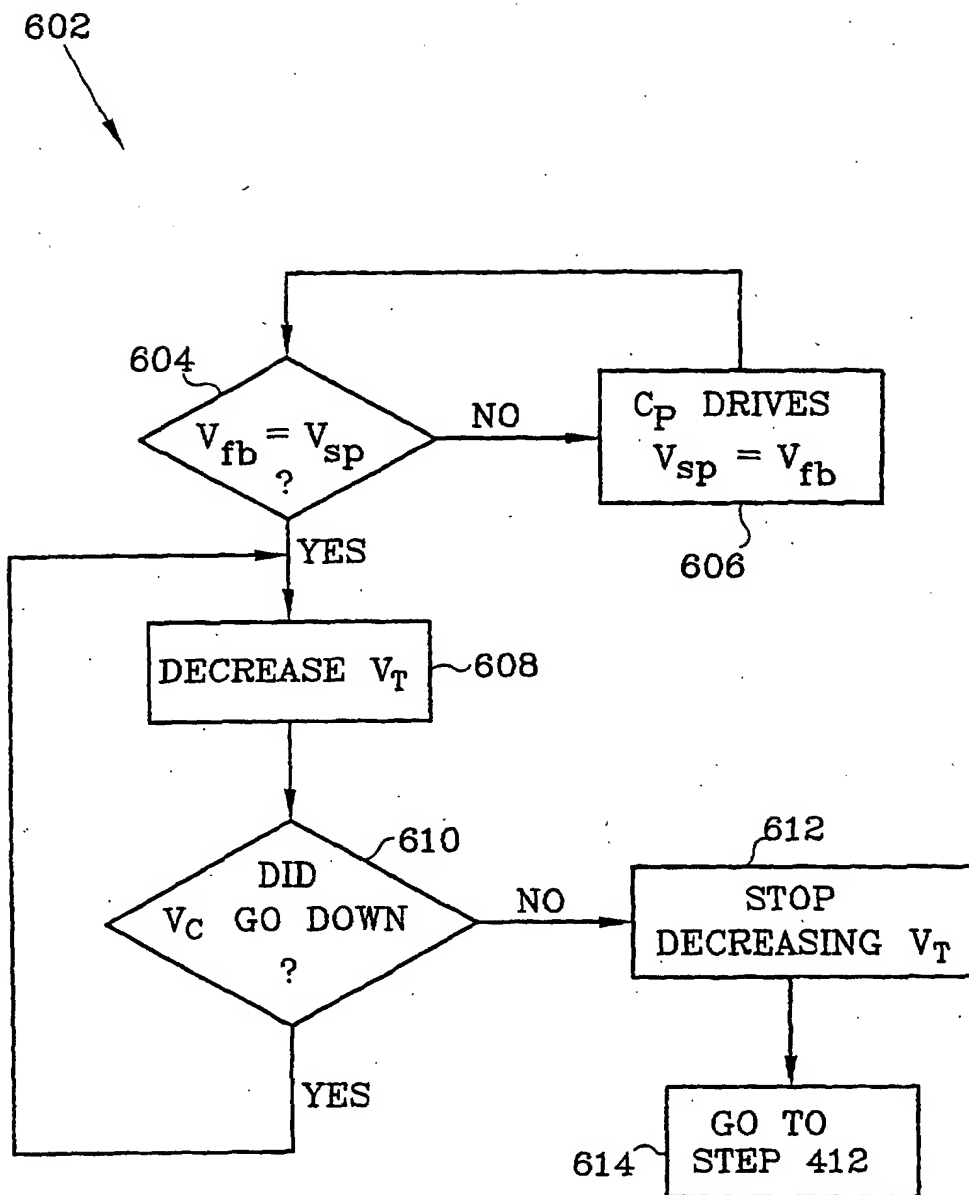


Fig. 3

402

*Fig. 4*

*Fig.5*

*Fig. 6*

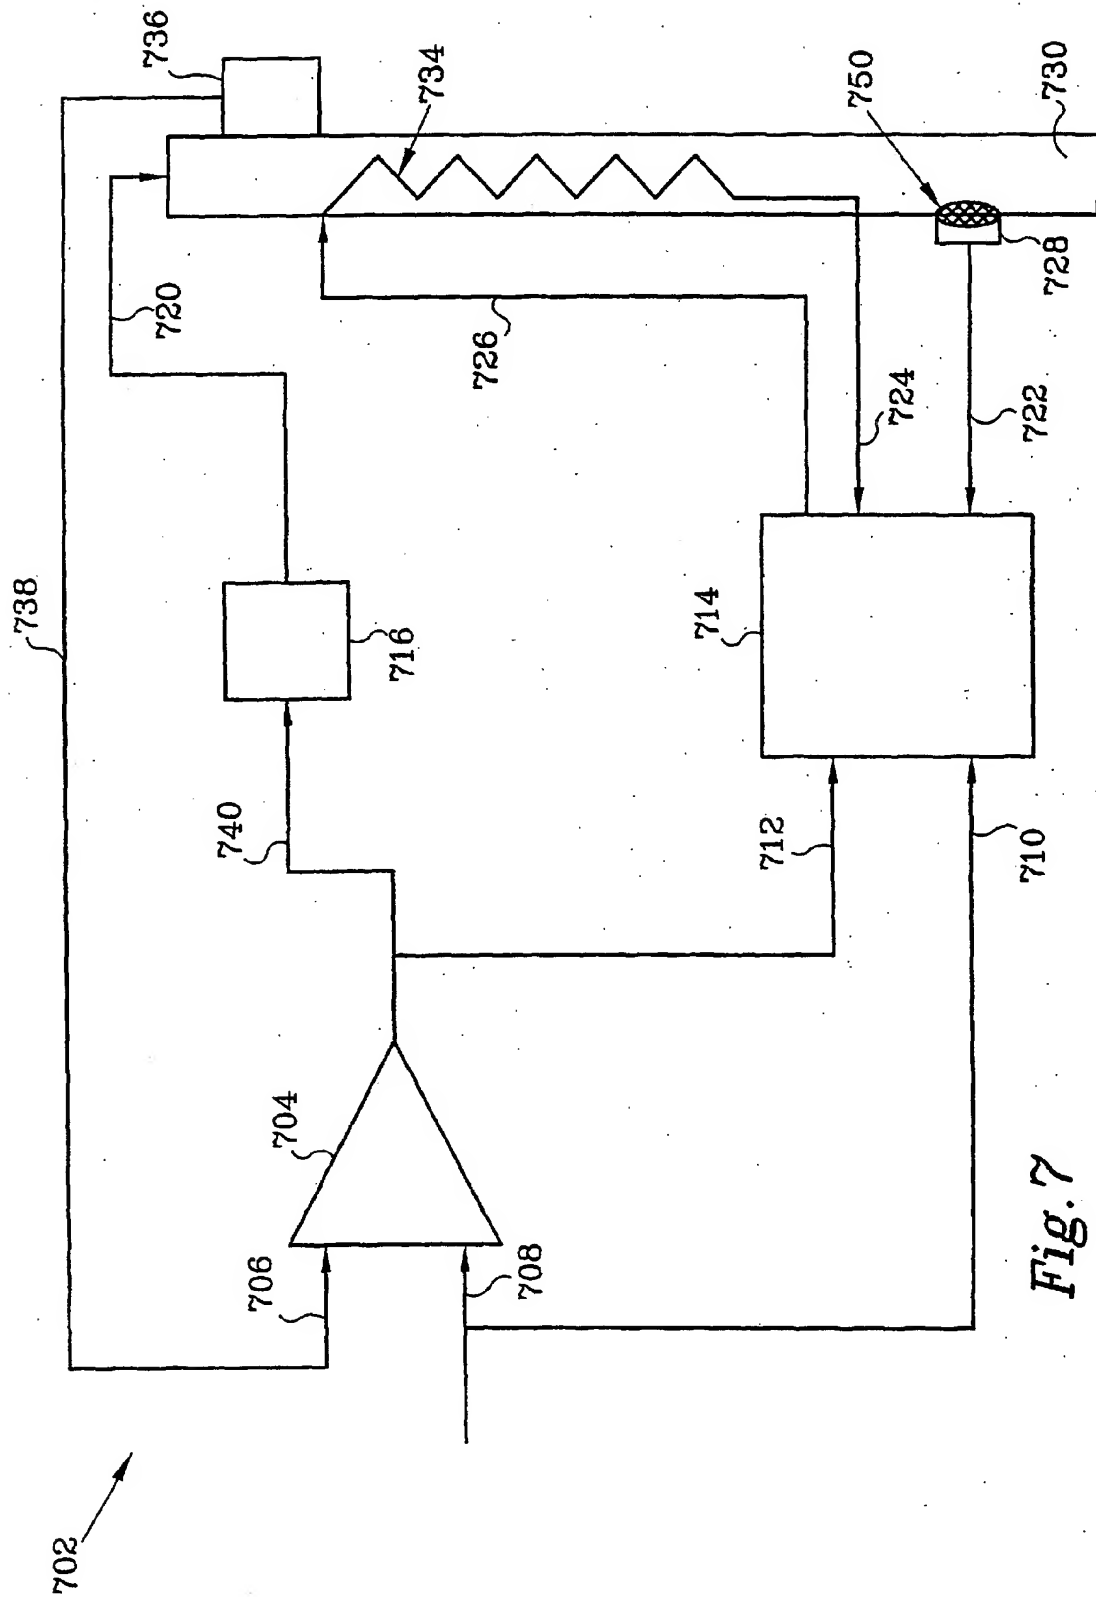


Fig. 7